



**Evaluation of the probability of
interruption, as established in the
Commission Regulation (EU)
2017/460, 16th March**

**VIP Ibérico and
High-pressure Network / LNG
Terminal Interconnection**

Gas Year 2022 / 2023

Versão 2

Data: 2022-05-31

Contents

1	Framework	3
2	Methodology.....	4
2.1	Probability of interruption	4
2.1.1	Capacity Management in the interconnection points	4
2.1.2	Interruption of interruptible capacity	5
2.2	Factor 'A'	6
3	Analysis for the VIP Ibérico.....	7
3.1	Offer of standard capacity products for interruptible capacity	7
3.2	Historical use of capacities	7
3.3	Calculation of the probability of interruption for 2022 / 2023	9
4	Analysis for the high-pressure network/LNG Terminal connection.....	13
4.1	Types of standard capacity products for interruptible capacity	13
4.2	Historical use of capacities	13
4.2.1	Evaluation of the interrupted capacity	14
4.2.2	Determination of the reference period	14
4.3	Calculation of probability of interruption for 2022 / 2023	16
5	Conclusions	19
	Annex 1 - Contracting interruptible capacity in the interconnection High-pressure network and LNG Terminal	20

1 Framework

The publication of Commission Regulation (EU) 2017/460 of 16th March 2017 establishing a network code on harmonised transmission tariffs structures for gas (Tariff Network Code) has defined, among others, the rules for the calculation of reserve prices for standard capacity products for interruptible capacity. In particular, Article 16 (1) specifies that reserve prices for standard capacity products for interruptible capacity should be calculated by applying a discount to the reserve prices of their respective firm standard capacity products, through the application of the formula¹:

$$Discount_{ex-ante} = Pro \times A \times 100\% \quad (1)$$

- (Pro) – probability of interruption;
- (A) – adjustment factor, applied to reflect the estimated economic value of the type of standard capacity product for interruptible capacity

Additionally, Article 183 (17) of the Portuguese Tariff Regulation² for the gas sector regarding the information to be delivered to the NRA, foresees that, for the establishment of the prices to be applied to standard capacity products for interruptible capacity for the use of the national transport network, transmission system operator must provide to the NRA, on an annual basis, the evaluation of the probability of interruption, according to the above-mentioned Commission Regulation. This assessment shall include:

- 1) a list of all types of standard capacity products for interruptible capacity offered, including the respective probability of interruption and level of discount to be applied;
- 2) an explanation on how the probability of interruption is calculated for each type of product;
- 3) the data used to calculate the probability of interruption.

Regarding the prices for standard capacity products for interruptible capacity, according to Article 167 (2) of the Portuguese Tariff Regulation, transmission system operator shall also suggest a value for parameter A, the adjustment factor that reflects the estimated economic value for each of these products, as also mentioned in Article (16) of the (EU) 2017/460 of 16th March 2017.

This document sets out the proposals of the transmission system operator for each of these parameters, in accordance with the definitions considered in the Tariff Regulation for the gas sector, for the application of the ex-ante discount on the following points:

- VIP Ibérico;
- Interconnection between the high-pressure network and the LNG Terminal.

¹ As an alternative to applying ex-ante discount, as established in Article 16 (4) the National Regulatory Authority may decide to apply an ex-post discount, whereby network users are compensated after the actual interruptions incurred.

² Regulation n.º 368/2021.

2 Methodology

2.1 Probability of interruption

The probability of interruption shall be calculated for each type of standard capacity product offered, for which the following equation shall apply, according to Article (16) of the (EU) 2017/460 of 16th March 2017:

$$Pro = \frac{N \times D_{int}}{D} \times \frac{CAP_{av.int}}{CAP} \quad (2)$$

- (N) is the expected number of interruptions;
- (D_{int}) is the average duration of expected interruptions (in hours);
- (D) is the total duration of the respective type of standard capacity product for interruptible capacity (in hours);
- (CAP_{av.int}) is the expected average amount of interrupted capacity for each interruption where such amount is related to the respective type of standard capacity product for interruptible capacity;
- (CAP) is the total amount of interruptible capacity for the respective type of standard capacity product for interruptible capacity.

2.1.1 Capacity Management in the interconnection points

In practice, when all firm capacity (where additional capacity is included) is contracted for a certain gas day, its underutilisation, either due to a low nomination or to a decrease in a renomination cycle, will lead to interruptible capacity available, as shown in figure 1.

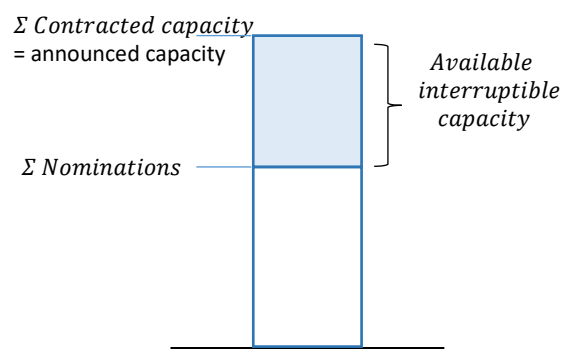


Figure 1

Such interruptible capacity may be contracted according to the rules defined in (EU) 2017/460 of 16th March 2017 as shown in figure 2.

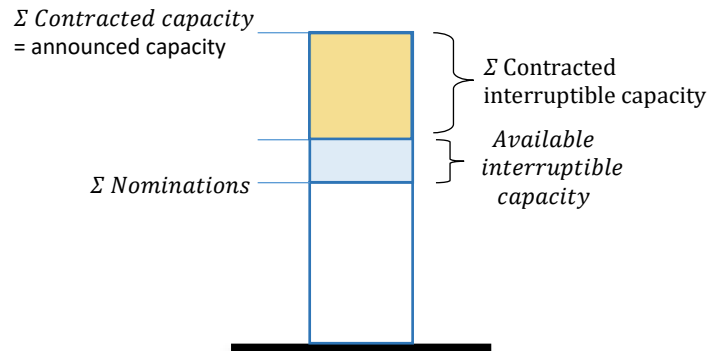


Figure 2

Under these circumstances, any further future renominations for higher values within the respective firm capacity contracted, will imply a shortage on the previously announced interruptible capacity. This occurrence may affect the interruptible capacities that had already been assigned, and thus creating an interruption of capacity, as shown in figure 3.

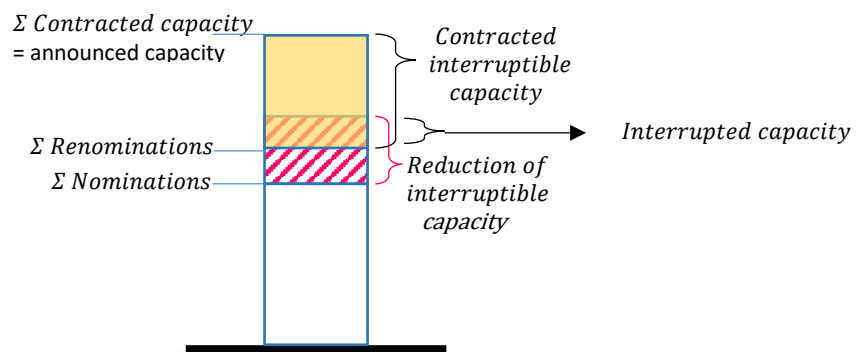


Figure 3

2.1.2 Interruption of interruptible capacity

Interruptible capacity products may be offered when all firm capacity is contracted but is not being requested and thus not being used. This idle capacity, although eventually previously confirmed could be interrupted due to the subsequent renominations performed by the network users entitled to the corresponding firm capacity.

Assuming that the market's historical behaviour regarding the use of the contracted firm capacity has identical statistical significance in situations where the firm capacity is sold out, it is reasonable to accept

that the probability of interruption of interruptible capacity on a given gas day results from the product between (i) the probability of contracting interruptible capacity available due to under-use of contracted firm capacity, illustrated in figure 1, and (ii) the probability of reducing the available interruptible capacity (variation of use by renomination to a higher value), illustrated in figure 2.

The following equation (3) shall apply:

$$\frac{N \times D_{int}}{D} = C \times PC(d) \times PR(d) \times R \quad (3)$$

- (C) - Ratio of the number of days on which interruptible capacity is expected to be contracted, in relation to the period considered.
- (PC(d)) - Probability of contracting a certain interruptible capacity on gas day d.
- (PR (d)) – Probability of reduction of a given interruptible capacity available on gas day d, obtained as a function of increases in the use of firm capacity in renomination processes occurring in a relevant historical period.
- (R) - Ratio of the number of days on which the increase in the use of firm capacity is expected in renomination processes, in relation to the period considered.

It is proposed to assume a behaviour of the frequency of occurrences in the contracting interval PC(d) identical to the frequency distribution found for PR(d).

It is considered that variable C is increased to the unit value, in order to simplify the methodology and because, for the time being, there is not sufficient data available for its modelling.

2.2 Factor 'A'

According to Article 167 of the Portuguese Tariff Regulation, factor 'A' is applied to reflect the estimated economic value of the type of standard capacity product for interruptible capacity, calculated for each, some or all interconnection points, and shall not be less than 1.

For the present analysis, it is appropriate to apply a unit value (A=1) to each of the standard capacity products for interruptible capacity at any of the interconnection points concerned.

3 Analysis for the VIP Ibérico

3.1 Offer of standard capacity products for interruptible capacity

Regulation (EU) 2017/459, establishing a network code on capacity allocation mechanisms in gas transmission systems, requires transmission system operators to offer standard capacity products for interruptible capacity in VIP Iberico according to the following:


- daily capacity product for interruptible capacity in both directions at interconnection points where the respective standard capacity product for firm capacity was sold out day-ahead or was not offered, to be allocated through an auction process;
- within-day capacity products for interruptible capacity, in both directions, shall only be allocated when firm capacity (additional capacity included), is sold out and shall be allocated through an over-nomination procedure.

These products shall be offered according to the rules defined in Regulation (EU) 2017/459, regarding capacity allocation mechanisms in gas transmission system.

3.2 Historical use of capacities

The virtual interconnection point, VIP Ibérico, had no interruption of interruptible capacity due to physical congestion during the period under analysis.

The following picture details the utilization of capacity in both directions for the period between October 2016 and September 2021.

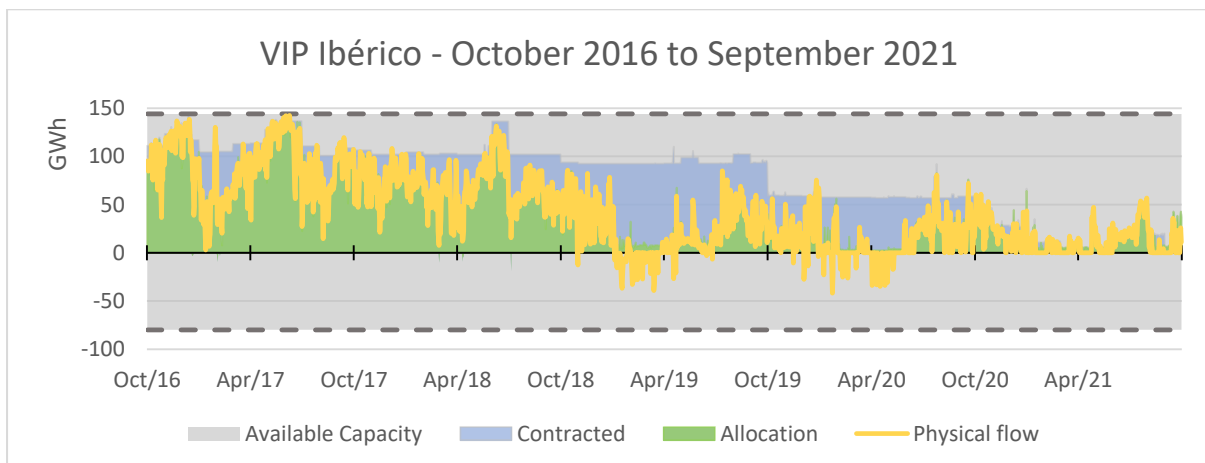

Tables (1 and 2) in the following paragraphs show the levels of contracting and utilisation of contracted capacities referred to the contracting of firm capacities in VIP Ibérico in biannual periods from October 2016 to September 2021.

- Direction Spain - Portugal

Table 1: Contracting capacities and utilisation of contracted capacity levels referred to firm capacities SP -> PT

Biennium	% Contracting	% Utilisation
2016-17 and 2017-18	76,92%	70,07%
2017-18 and 2018-19	69,46%	45,91%
2018-19 and 2019-20	53,02%	26,75%
2019-20 and 2020-21	27,29%	39,79%

- Direction Portugal - Spain

Table 2: Contracting capacities and utilisation of contracted capacity levels referred to firm capacities – PT -> SP

Biennium	% Contracting	% Utilisation
2016-17 and 2017-18	0,00%	1,50%
2017-18 and 2018-19	3,59%	16,38%
2018-19 and 2019-20	9,24%	36,30%
2019-20 and 2020-21	12,74%	43,34%

The highest levels of contracting were verified in the direction Spain - Portugal, between 2016 to 2018, prone to a higher dynamic in the re-nominations compatible with the assumptions of statistical significance of the methodology applied. Therefore, the period between October 2016 and September 2018 is considered to be the relevant historical period that best characterizes the expected occurrence of interruption of interruptible capacity products for the gas year 2022-2023.

The following pictures detail the characterization of capacity utilization in the reference biennium.

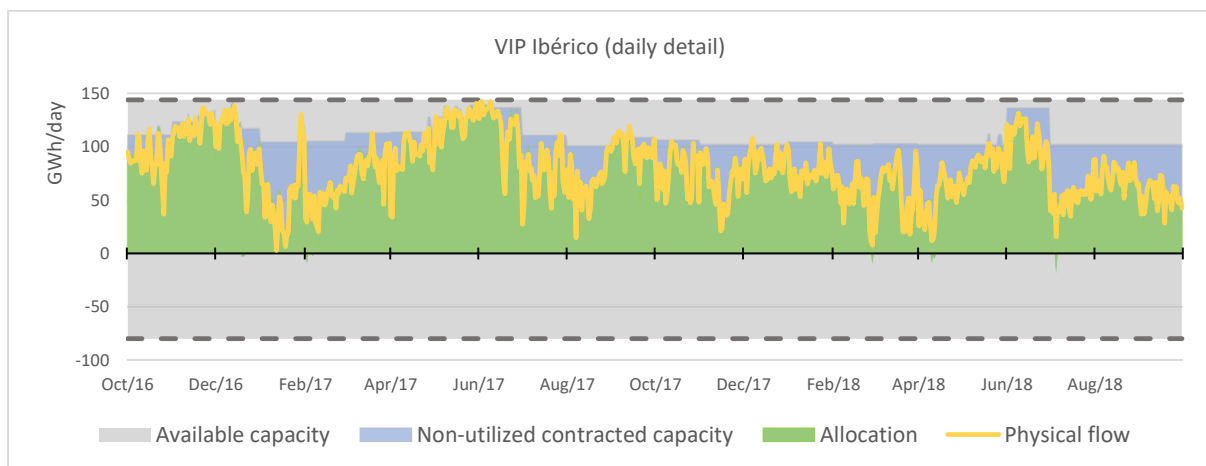


Figure 4: Utilization of capacities in the reference period (2016-17 and 2017-18)

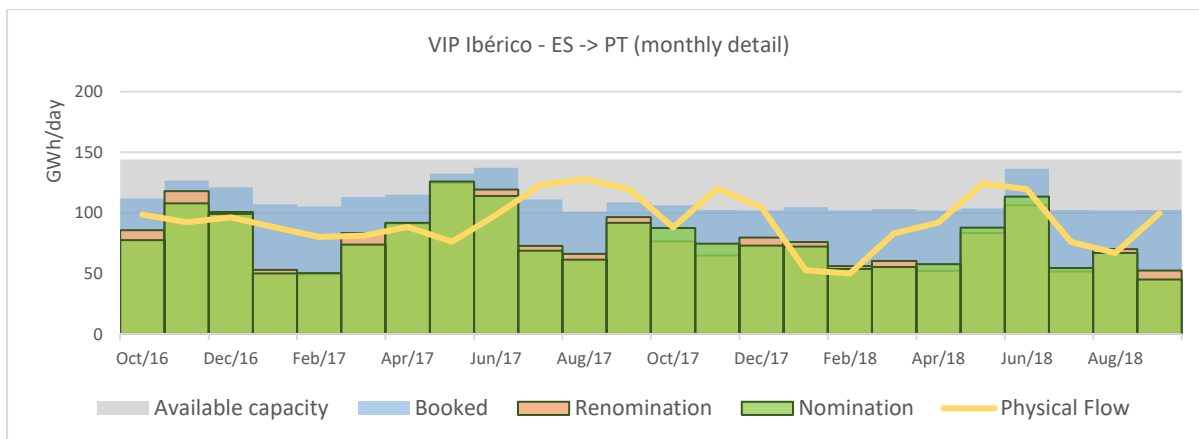


Figure 5: Average monthly use of capacities in the reference period (2016-17 and 2017-18). Renominated quantities above nominations shown in orange; downwards renominated quantities shown in darker green.

Remark: Physical operations non-coincident with commercial utilization as agreed between interconnected operators.

3.3 Calculation of the probability of interruption for 2022 / 2023

Through the analyses of the increase in the use of capacity resulting from the renomination processes, it was possible to calculate the frequency of reduction applied to the interruptible capacity (referred to the available interruptible capacity), thus determining the distribution of reduction of this capacity, PR(d), expected on gas day d, as shown in figure 6.

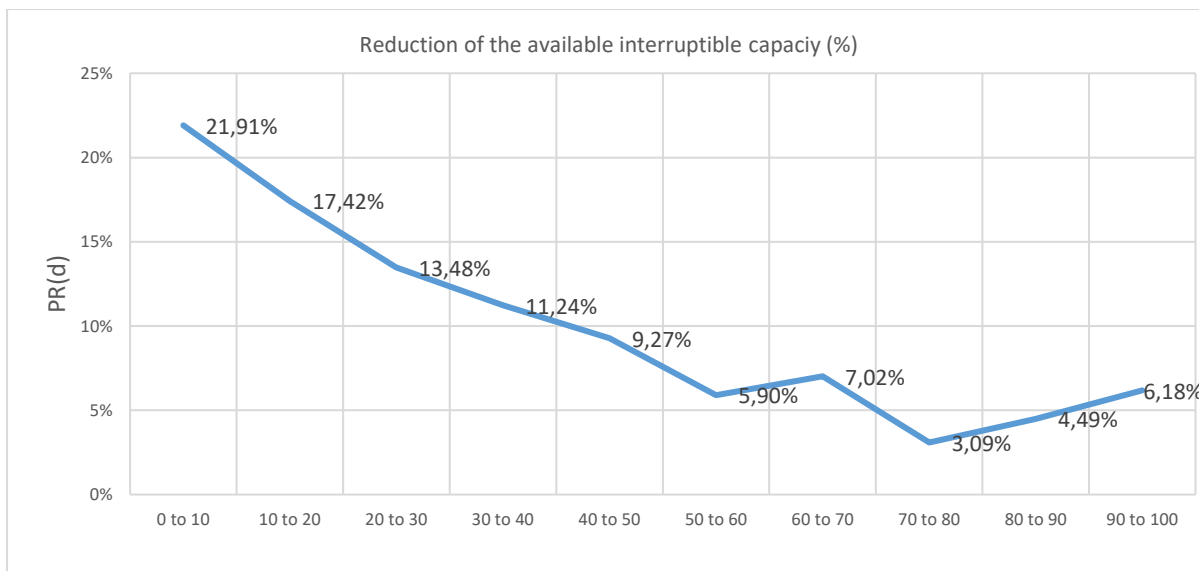


Figure 6: Reduction of interruptible capacity for each gas day PR(d)

As already mentioned in paragraph 2.1.2, it is assumed that the probability of contracting interruptible capacity, PC(d), presents the same distribution as the reduction of the available interruptible capacity, determined for PR(d), with the former competing with the latter in the reduction of this capacity, but in

opposite directions. The expected number of interruptions for each set of interruptible capacity reduction hypothesis by contracting, $PC(d)$, and by renomination, $PR(d)$, for each available interruptible capacity interval, is shown in the matrix in Table 3, by multiplying the second by the third term of the equation (3).

Table 3: Expected interruptions for each set of hypothesis of reduction of interruptible capacity, by contracting, $PC(d)$, and by renomination, $PR(d)$

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		PR(d)									
	PC(d)	21,91%	17,42%	13,48%	11,24%	9,27%	5,90%	7,02%	3,09%	4,49%	6,18%
90 to 100	6,18%	1,354%	1,076%	0,833%	0,694%	0,573%	0,365%	0,434%	0,191%	0,278%	0,382%
80 to 90	4,49%		0,783%	0,606%	0,505%	0,417%	0,265%	0,316%	0,139%	0,202%	0,278%
70 to 80	3,09%			0,417%	0,347%	0,286%	0,182%	0,217%	0,095%	0,139%	0,191%
60 to 70	7,02%				0,789%	0,651%	0,414%	0,493%	0,217%	0,316%	0,434%
50 to 60	5,90%					0,547%	0,348%	0,414%	0,182%	0,265%	0,365%
40 to 50	9,27%						0,547%	0,651%	0,286%	0,417%	0,573%
30 to 40	11,24%			No interruption: $PC(d) \times PR(d) = 0$				0,789%	0,347%	0,505%	0,694%
20 to 30	13,48%								0,417%	0,606%	0,833%
10 to 20	17,42%									0,783%	1,076%
0 to 10	21,91%										1,354%

Example: If in a given time when there is available interruptible capacity, a level of contracting of this capacity occurs in the interval up to 10% (an event which has a probability of occurrence $PC(d) = 21,91\%$), the reduction of interruptible capacity up to 90% cannot have any impact. Only when the level of reduction in the capacity level is in the 90 to 100% range (independent event with probability of occurrence $PR(d) = 6,18\%$) will an interruption occur, with a 1,354% probability. The same interpretation should be made for each contracting interval.

For each interval of available interruptible capacity, the quociente between the interruptible capacity hypothesis ($CAP_{av.int}$) and contracted interruptible capacity (CAP) is the interrupted contracted interruptible capacity. The matrix in Table 4 shows the contracted interruptible capacities likely to be interrupted for each combination of the variables mentioned $CAP_{av.int}$ and CAP . With the definition of this variable, it will be possible to quantify the amount affected by each expected interruption record, from table 3.

Table 4: Interrupted contracted interruptible capacity for each set of hypothesis of interrupted capacity ($CAP_{av.int}$) and contracted interruptible capacity (CAP): $CAP_{av.int} / CAP$

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		Interrupted capacity (C)									
Contracted interruptible capacity (L)		5%	15%	25%	35%	45%	55%	65%	75%	85%	95%
90 to 100	95%	0%	11%	21%	32%	42%	53%	63%	74%	84%	95%
80 to 90	85%	0%	12%	24%	35%	47%	59%	71%	82%	94%	
70 to 80	75%	0%	13%	27%	40%	53%	67%	80%	93%		
60 to 70	65%	0%	15%	31%	46%	62%	77%	92%			
50 to 60	55%	0%	18%	36%	55%	73%	91%				
40 to 50	45%	0%	22%	44%	67%	89%					
30 to 40	35%	0%	29%	57%	86%						
20 to 30	25%	0%	40%	80%							
10 to 20	15%	0%	67%								
0 to 10	5%	0%									

Example: Each entry in the table results from the application of the following expression: $\text{Max}\{L+C-100\%;0\}/L$ - where "C" and "L" correspond to each value in the "interrupted capacity" column and to each value in the "contracted interruptible capacity" line, respectively. Applying the example described, "C" = 25%, "L" = 85%, and so the contracted interruptible capacity interrupted will be $\text{Max}\{85\%+25\%-100\%;0\}/85\% = 12\%$.

Taking as reference the days where available firm capacity increases in renomination processes, the probability of interruption will be obtained through the product of the probability of occurrence of an interruption ($CP(d) \times PR(d)$), from table 3, by the contracted interruptible capacity affected, i.e. interrupted ($CAP_{av.int} / CAP$), referred to the available interruptible capacity (table 4). The result of this operation is shown in table 5.

Table 5: Product between the probability of occurrence of an interruption, $PC(d) \times PR(d)$ from table 3, by the interrupted contracted interruptible capacity, $CAP_{av.int}/CAP$

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		Interrupted capacity									
Interrupted contracted interruptible capacity		5%	15%	25%	35%	45%	55%	65%	75%	85%	95%
90 to 100	95%		0,113%	0,175%	0,219%	0,241%	0,192%	0,274%	0,141%	0,234%	0,362%
80 to 90	85%		0,071%	0,119%	0,147%	0,125%	0,186%	0,098%	0,166%	0,261%	
70 to 80	75%			0,046%	0,076%	0,073%	0,116%	0,064%	0,111%	0,178%	
60 to 70	65%				0,100%	0,127%	0,228%	0,134%	0,243%	0,401%	
50 to 60	55%					0,063%	0,151%	0,099%	0,193%	0,331%	
40 to 50	45%						0,145%	0,127%	0,278%	0,509%	
30 to 40	35%							0,099%	0,289%	0,595%	
20 to 30	25%								0,242%	0,667%	
10 to 20	15%									0,718%	
0 to 10	5%										
$\Sigma [PC(d) \times PR(d) \times CAP_{av.int}/CAP] =$											9,527%

By applying the sum to the set of probability distributions calculated in the matrix in Table 5, it is possible to calculate the probability of interruption, considering the days of increases in firm capacity in renomination

processes as a reference. Since the probabilities calculated so far were determined in the scope of the ratio of available firm capacity increases in renomination processes, R, it is necessary to transpose this reality to the referential of the period considered in the study, applying the last term of equation (3). The value calculated for R for the period under consideration is 48,77%, resulting in a calculated PRO of

$$PRO = \Sigma \left[PC(d) \times PR(d) \times \frac{CAP_{av.int}}{CAP} \right] \times R = \mathbf{4,646\%},$$

This shall be the probability of interruption to be considered, applied equally to both directions.

4 Analysis for the high-pressure network/LNG Terminal connection

4.1 Types of standard capacity products for interruptible capacity


According to Manual de Procedimentos de Acesso às Infraestruturas do setor do gás natural, published in Diretiva nº 07/2020, Procedure nº 4 establishes that the transmission system operator shall offer standard capacity products for interruptible capacity for:

- within-day interruptible capacity on regasification, in case all firm capacity, including additional capacity eventually offered, has been sold-out, to be confirmed through an over-nomination mechanism.

These products shall be offered according to the same rules that apply to VIP Ibérico, as defined in Regulation (EU) 2017/459, establishing capacity allocation mechanisms in gas system networks, applied to the regasification capacity.

4.2 Historical use of capacities

The graphic in the following picture shows the use of the regasification process, for the period between October 2016 and September 2021.

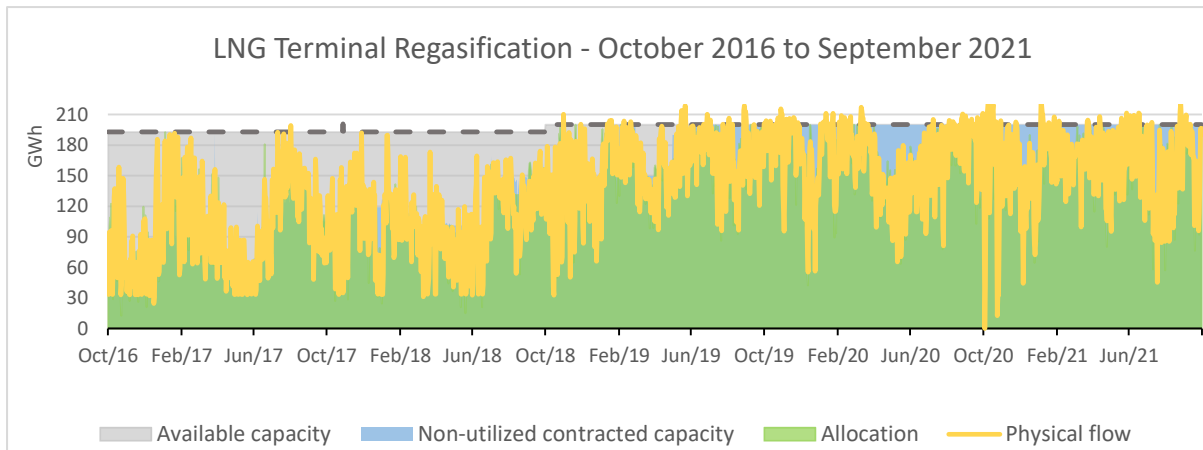

Interruptible capacity products were made available to the market as of October 2020, after the entering into force of Manual de Procedimentos de Acesso à Infraestruturas do setor do gás natural, published in March 2020. For the gas year 2020/2021 there were interruptible capacities contracted through the over-nomination mechanism that were, some of them and at some point reduced due to the renomination process.

4.2.1 Evaluation of the interrupted capacity

The analysis of the contractual processes and interruption of interruptible capacity for the gas year 2020/2021, the following data applied:

Total interruptible capacity 2020/2021		
Contracted by over-nomination	930,0 GWh	
Interrupted in renomination process	76,7 GWh	(8 %)

Considering these figures, it is possible to conclude that the interrupted capacity was nearly 8% of the total interruptible capacity contracted for the period in analysis. In Annex I an analysis is made to the interruptions that occurred for this product.

4.2.2 Determination of the reference period

The following table (table 6) shows the levels of both contracting and utilisation of contracted firm capacities for the biennial periods from October 2016 through September 2021.

Table 6: Contracting capacities and utilisation of contracted capacity levels referred to firm capacities – Regasification

Biennium	% Contract	% Utilisation
2016-17 and 2017-18	55,86%	92,09%
2017-18 and 2018-19	74,61%	89,29%
2018-19 and 2019-20	94,65%	87,06%
2019-20 and 2020-21	100,00%	82,89%

It is observed that the 2019-2020 and 2020-21 biennium reached the highest levels of contracting, prone to higher dynamics of renomination compatible with the assumptions of statistical significance of the methodology in application. Therefore, the period between October 2019 and September 2021 is considered the relevant historical period that best characterises the expected occurrence of standard capacity products for interruptible capacity for the 2022-2023 gas year. The following graphs (Figure 7 and 8) show the levels of contracting and utilisation of regasification capacity in the period from October 2019 to September 2021. Throughout this period, it can be seen from figures 7 and 8 that regasification capacity utilisation is high, with a peak on utilisation in 2019-20 and 2020-21. The high utilisation rate of regasification capacity is due to the interest of the market agents in supplying their customers through LNG.

This interest has been increasing over 2019-20 and 2020-21, with the market successively contracting more capacity for longer periods, culminating in the sale of all capacity for gas year 2019/2020 at the annual capacity auction. Demand for regasification capacity results in 89% of the announced technical capacity

being contracted in gas year 2018/2019. This figure reached 100% in gas year 2019-20 and again in 2020-21. As for utilisation, it represented 84% of contracted capacity in 2019/2020 and 82% in 2020-21. It is also worth mention that in 10% of the period in analysis, capacity utilisation equalled the contracted capacity. Thus, and considering the behaviour explained in the use of regasification capacity, it is considered that there are favourable conditions for the occurrence of capacity interruption due to congestion.

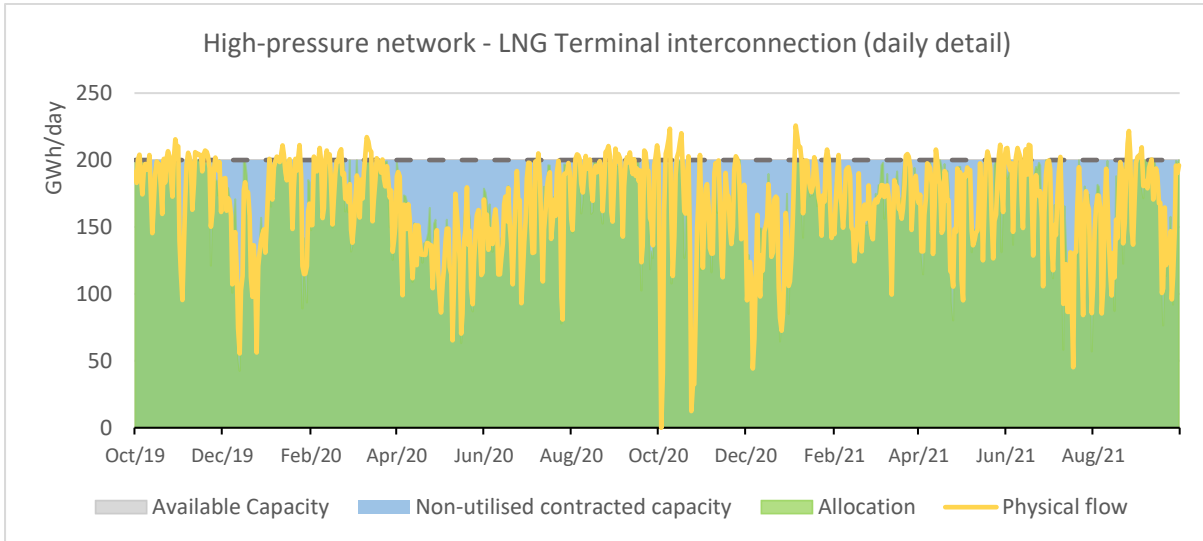


Figure 7: Capacity utilisation in the reference period

In this picture there are seldom days where the physical flow reaches higher values than the maximum capacity available, due to favourable operational conditions where the operator itself is likely to move some gas from the Terminal to the high-pressure network.

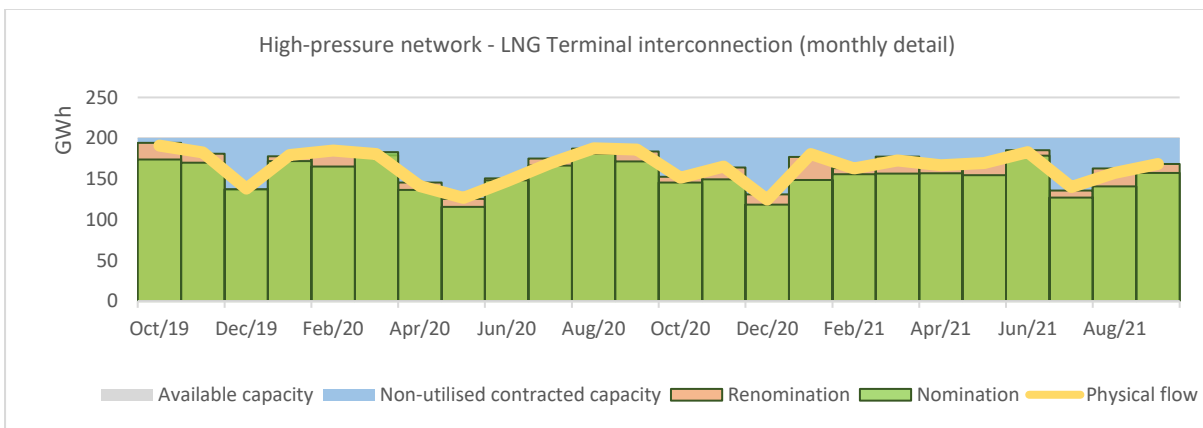


Figure 8: Capacity monthly average utilisation in the period. Renominated quantities above nominations shown in orange.

For the above mentioned, the period from October 2019 to September 2021 is considered to be of historic relevance, that best characterises the expected occurrence of interruption of standard capacity products for interruptible capacity for gas year 2022-2023.

4.3 Calculation of probability of interruption for 2022 / 2023

By analysing the history of increases in capacity utilisation of the renomination processes, it was possible to determine the frequency of interruptible capacity reduction experienced, determining the distribution of this capacity reduction, PR(d), expected on gas day d, as shown in figure 9.

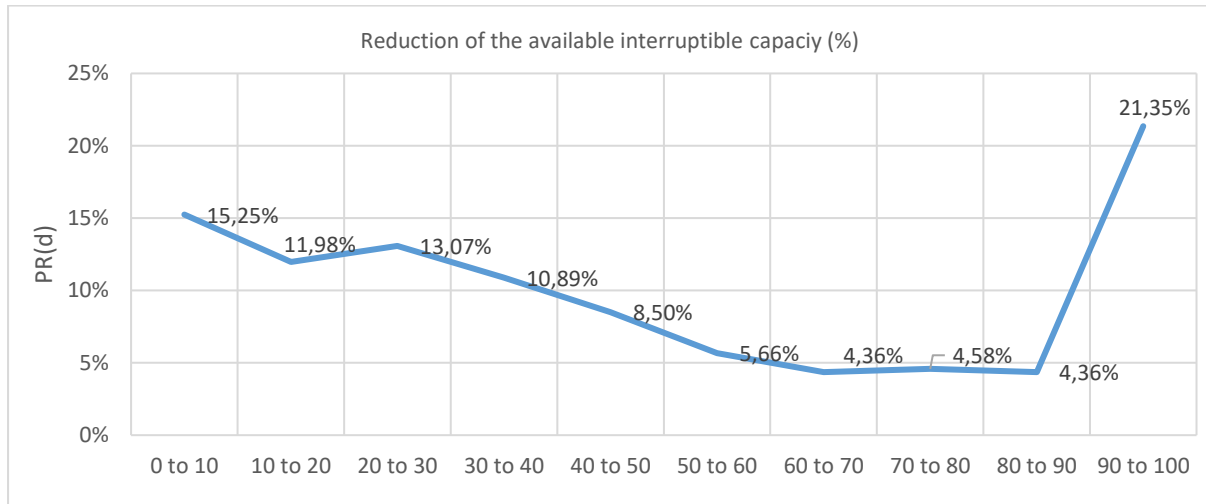


Figura 9: Reduction of interruptible capacity expected for each gas day PR(d)

As already mentioned in 2.1.2, it is assumed that the probability of contracting interruptible capacity, PC(d), presents the same distribution as the reduction in available interruptible capacity, determined for PR(d), with the former competing with the latter in the reduction of this capacity, but in opposite directions.

The expected number of interruptions for each set of interruptible capacity reduction hypothesis by contracting, PC(d), and by renomination, PR(d), for each available interruptible capacity interval, is shown in the matrix in Table 7, by multiplying the second by the third term of equation (3).

Table 7: Interruptions expected for each set of hypothesis of reduction of interruptible capacity, contracted, PC(d), and renominated, PR(d)

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		PR(d)									
PC(d)		15,25%	11,98%	13,07%	10,89%	8,50%	5,66%	4,36%	4,58%	4,36%	21,35%
90 to 100	21,35%	3,256%	2,558%	2,791%	2,326%	1,814%	1,209%	0,930%	0,977%	0,930%	4,559%
80 to 90	4,36%		0,522%	0,570%	0,475%	0,370%	0,247%	0,190%	0,199%	0,190%	0,930%
70 to 80	4,58%			0,598%	0,498%	0,389%	0,259%	0,199%	0,209%	0,199%	0,977%
60 to 70	4,36%				0,475%	0,370%	0,247%	0,190%	0,199%	0,190%	0,930%
50 to 60	5,66%					0,481%	0,321%	0,247%	0,259%	0,247%	1,209%
40 to 50	8,50%						0,481%	0,370%	0,389%	0,370%	1,814%
30 to 40	10,89%							0,475%	0,498%	0,475%	2,326%
20 to 30	13,07%								0,598%	0,570%	2,791%
10 to 20	11,98%									0,522%	2,558%
0 to 10	15,25%										3,256%

Example: if in a given time when there is interruptible capacity available, a level of contracting of this capacity occurs in the interval of up to 10% (an event which has a probability of occurrence $PC(d) = 15,25\%$), the reduction of interruptible capacity up to 90% cannot have any impact. Only when the level of reduction in the capacity level is in the 90 to 100% range (independent event with probability of occurrence $PR(d) = 21,35\%$) will an interruption occur, with a 3,256% probability. The same interpretation applies for each contracting interval.

For each interval of available interruptible capacity, the quotient between the interruptible capacity hypothesis ($CAP_{av.int}$) and contracted interruptible capacity (CAP) is the interrupted contracted interruptible capacity. The matrix in Table 8 shows the contracted interruptible capacities likely to be interrupted for each combination of the variables mentioned, $CAP_{av.int}$ and CAP . With the definition of this variable, it will be possible to quantify the quantity affected by each expected interruption record, from table 7.

Table 8: Interruption of contracted interruptible capacity for each set of hypothesis of interrupted capacity ($CAP_{av.int}$) and contracted interruptible capacity (CAP): $CAP_{av.int} / CAP$.

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		Interrupted capacity [C]									
Contracted interruptible capacity [L]		5%	15%	25%	35%	45%	55%	65%	75%	85%	95%
90 to 100	95%	0%	11%	21%	32%	42%	53%	63%	74%	84%	95%
80 to 90	85%		0%	12%	24%	35%	47%	59%	71%	82%	94%
70 to 80	75%			0%	13%	27%	40%	53%	67%	80%	93%
60 to 70	65%				0%	15%	31%	46%	62%	77%	92%
50 to 60	55%					0%	18%	36%	55%	73%	91%
40 to 50	45%						0%	22%	44%	67%	89%
30 to 40	35%							0%	29%	57%	86%
20 to 30	25%								0%	40%	80%
10 to 20	15%									0%	67%
0 to 10	5%										0%

Exemplo: Each entry in the table results from the application of the following expression: $\text{Max}\{L+C-100\%;0\}/L$ - where "C" and "L" correspond to each value in the "interrupted capacity" column and to each value in the "contracted interruptible capacity" line, respectively.

Applying the example described, "C" = 25%, "L" = 85%, and so the contracted interruptible capacity interrupted will be $\text{Max}\{85\%+25\%-100\%;0\}/85\% = 12\%$.

Considering as reference the days of firm capacity increases in renomination processes, the probability of interruption will be obtained through the product of the probability of the occurrence of an interruption ($PC(d) \times PR(d)$), from table 7, by the contracted interruptible capacity affected, i.e., interrupted ($CAP_{av.int}/CAP$), against the available interruptible capacity (table 8). The result of this operation is shown in table 9.

Table 9: Product between the probability of occurrence of an interruption, $PC(d) \times PR(d)$ in table 7, by the interrupted contracted interruptible capacity, $CAP_{av.int}/CAP$

		0 to 10	10 to 20	20 to 30	30 to 40	40 to 50	50 to 60	60 to 70	70 to 80	80 to 90	90 to 100
		Interrupted Capacity									
Capacidade interruptível contratada interrompida		5%	15%	25%	35%	45%	55%	65%	75%	85%	95%
90 to 100	95%		0,269%	0,588%	0,734%	0,764%	0,637%	0,588%	0,720%	0,783%	4,319%
80 to 90	85%			0,067%	0,112%	0,131%	0,116%	0,112%	0,141%	0,156%	0,876%
70 to 80	75%				0,066%	0,104%	0,104%	0,106%	0,140%	0,159%	0,912%
60 to 70	65%					0,057%	0,076%	0,088%	0,123%	0,146%	0,859%
50 to 60	55%						0,058%	0,090%	0,141%	0,180%	1,099%
40 to 50	45%							0,082%	0,173%	0,247%	1,613%
30 to 40	35%								0,142%	0,271%	1,994%
20 to 30	25%									0,228%	2,233%
10 to 20	15%										1,706%
0 to 10	5%										
$\Sigma [PC(d) \times PR(d) \times CAP_{av.int}/CAP] =$											24,306%

By applying the sum to the set of probability distributions calculated in the matrix in Table 9, it is possible to calculate the probability of interruption, considering the days of increases in firm capacity in renomination processes as a reference. Since the probabilities calculated so far were determined in the scope of the ratio of firm capacity increases in renomination processes, R, it is necessary to transpose this reality to the referential of the period considered in the study, applying the last term of equation (3). The value calculated for R for the period under consideration is 62,79%, resulting in a calculated PRO of:

$$PRO = \Sigma \left[PC(d) \times PR(d) \times \frac{CAP_{av.int}}{CAP} \right] \times R = \mathbf{15,261\%}$$

This shall be the probability of interruption to be considered, which reflects the more recente behaviour of network users.

5 Conclusions

Having in mind the application of an ex-ante discount when determining tariffs for interruptible capacity in the 2022-2023 gas year, the transmission system operator submits a reasoned proposal for the parameters set out in the Tariff Regulations for the gas sector. These parameters are: (i) the probability of interruption of interruptible capacity (Pro); and (ii) adjustment factor to the estimated economic value of the type of product (A).

In the study regarding the determination of the probability, a common methodology was applied both to VIP Ibérico and to the High-pressure network and LNG Terminal interconnection. This option is based on the fact that, in both cases, the offer of interruptible capacity and the respective interruption result from the nomination behaviour and subsequent renomination, regarding the specificities in the use of the infrastructures in each point. This approach incorporates quantitative elements of the use of the respective points in relevant history in the most recent regulatory periods, considering for this purpose the biennium with the highest level of contracting.

In the particular case of the high-pressure network and the LNG Terminal connection, data shows the first year where interruptible capacity was offered and its respective interruption, shown through the global amount of contracting and interruption that occurred, as in the table:

Total interruptible capacity 2020/2021		
<i>Contracted by over-nomination</i>	930,0 GWh	
<i>Interrupted in renomination process</i>	76,7 GWh	(8,2 %)

As this is a result obtained from a reduced time sample, it has not yet been considered for the evaluation of the methodology currently applied. It is proposed that a new evaluation be carried out in the future, when the duration of the sample is at least equal to the reference biennium.

For factor 'A' it was considered appropriate to apply a unit value (A=1) to each of the standard standard capacity products for interruptible capacity at any of the interconnection points concerned, and considering there is a neutral variation in the economic value of each product against the respective probability values determined by the methodology.

The following table shows the transmission system operator's proposal for these parameters:

High-pressure network interconnection points	Produto	Pro	A
<i>VIP Ibérico (SP->PT)</i>	Daily	4,646 %	1
	Within-day		
<i>VIP Ibérico (PT->SP)</i>	Daily	4,646%	1
	Within-day		
<i>LNG Terminal (Regasification)</i>	Within-day	15,261 %	1

Annex 1 - Contracting interruptible capacity in the interconnection High-pressure network and LNG Terminal

In the gas year 2020/2021, following the publishing of the revision of the Manual de Procedimentos de Acesso às Infraestruturas do Setor do Gás Natural, the concept of interruptible capacity became applicable also at internal points of the RNTIAT.

In the gas year under review, a total of 18,68 TWh in interruptible capacity was offered for the interconnection point between the high-pressure network and the LNG Terminal (regasification), which means around 26% of the total firm capacity made available to the market. In monthly terms, the distribution of the supply of interruptible capacity compared to firm capacity was as shown in the Figure A1:

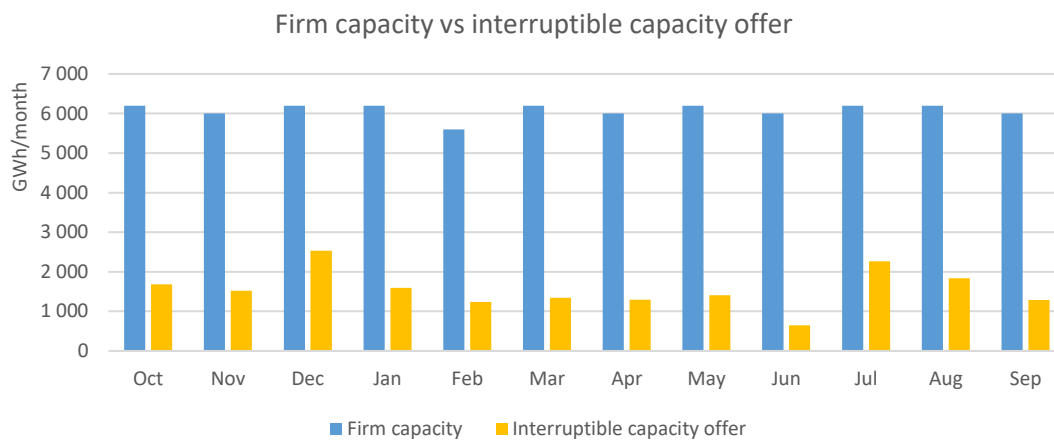


Figure A1: Monthly values of capacity offered: firm and interruptible

Overall, the contracted capacity for the period between October 2020 and September 2021 was 930 GWh, about 5% of the total of this capacity. Regarding the contracting of interruptible capacity compared to the capacity made available, the distribution was as follows:

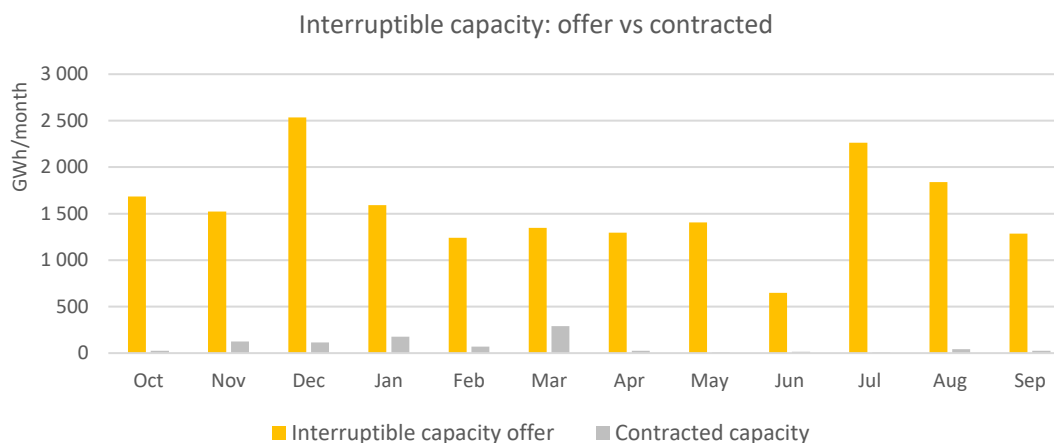


Figure A2: Monthly values of interruptible capacity: offer and contracting

For the gas year under review, of the total 930,00 GWh contracted, 825,16 GWh were confirmed, corresponding to an effective use of 88,7%. This leads to the conclusion that there was a reduction compared to the initial contracting of this product.

In effect, this reduction could occur in one of two ways: either the agent who requested the interruptible capacity revised its intention reducing it, or the agent who had firm capacity renominated upwards implying an interruption for the agent with interruptible capacity. The overall values for 2020/2021 were as follows:

Interruptible capacity contracted [kWh]	930 002 197
Confirmed Quantities [kWh]	825 156 197
Applied reduction: by renomination [kWh]	28 125 000
Applied reduction: by interruption [kWh]	76 721 000

Transposing the data for regasification in gas year 2020/2021 to the model presented by Art. 16 of the Tariff Network Code would result in the following analysis:

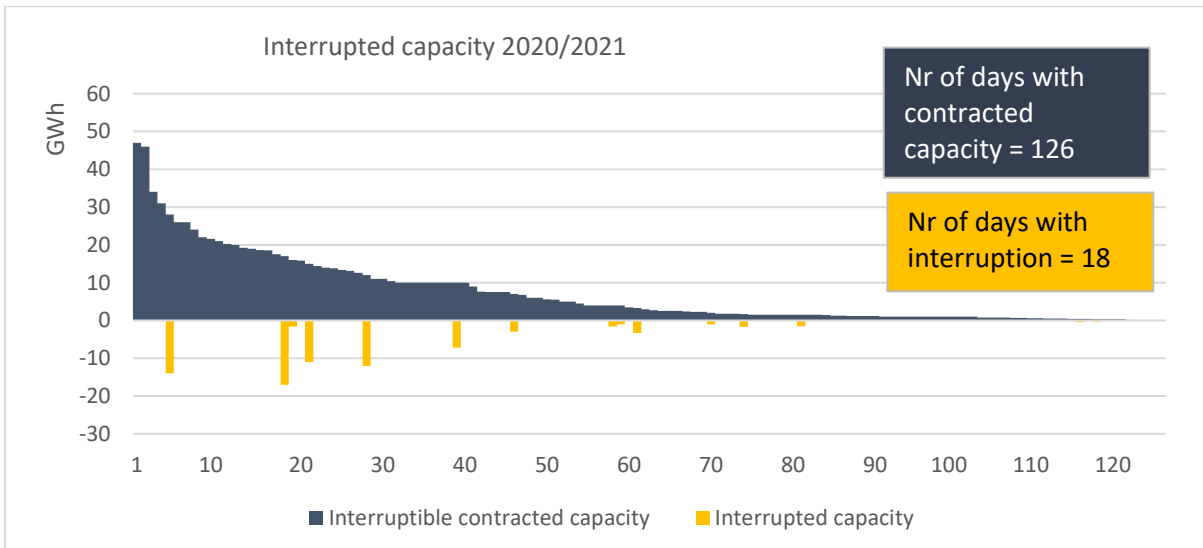


Figure A3: Analysis to the occurrence of interruption of interruptible capacity.

Interruption occurrence rate

Nr of days with contracted interruptible capacity [days]	126
Nr of days with interrupted interruptible capacity [days]	18
Expected number of interruptions N	$18/126 = 0,143$

Applied capacities

Average contracted capacity over the period [GWh/d]	7,38
Average interrupted capacity [GWh/d]	4,26
CAP av. Int / CAP	$4,26/7,38 = 57,7\%$

Considering that the period in question would be referenced to the gas day, i.e. 24 h:

Duration of the interruption

D _{int} [hours]	24
D [hours]	24
D _{int} / D	24/24 = 1

Applying formula (2),

$$\text{Pro} = \frac{N \times D_{\text{int}}}{D} \times \frac{\text{CAP}_{\text{av. int}}}{\text{CAP}} \quad (2)$$

The result of the probability of interruption is:

$$\text{PRO} = [(0,143 \times 24) / 24] \times [4,26 / 7,38] = 0,143 \times 57,7\% = 8,2\%$$